


Volusia Gas Cap

The only tools required are two Phillips screwdrivers, one medium, one very small.

Overview



Disassembly

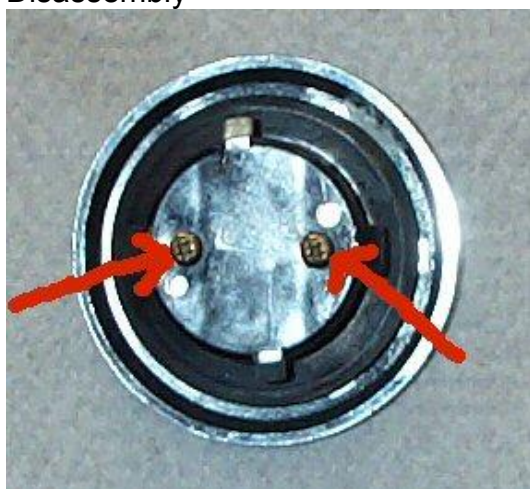

1) Remove two bottom screws



2) Separate top and bottom, put bottom to the side, out of the way.

3) Remove metal plate and lock, leaving only the very top of the cap.



4) Remove small screw (arrow). There is a spring under the screw. This screw holds the cylinder protector



5) Completely disassembled cap



4) Screw and spring. Apply lock-tite to only this screw and re-assemble.